SEPARATELY MOUNTED KEYS
6050 AND 6051 TYPES
CONNECTIONS

1. GENERAL

1.01 Separately mounted keys may be used on 1A, 1A1, 1A2, and 6A key telephone systems. Keys are factory wired for use with 1A1 or 1A2 key telephone systems.

1.02 This section is reissued to:

- Rearrange sequence of tables.
- Correct strapping and telephone set connections to Fig. 8, 9, and 10.
- Combine connection figures for 6050-type keys to show both the A25A connector cable and D50P cord.
- Include new conductor colors for A25A and A50A connector cables.

1.03 Due to extensive changes, marginal arrows have been omitted.

1.04 When a 6051A or 6051C key is used for pickup and hold on 1A and 1A1 lines, the 1A1 lines are restricted to the 599A or 599B key and the 1A lines are restricted to the 598A key. Do not intermix 1A, 1A1, and 1A2 lines on the same key.

1.05 When no hold is required, 1A and 1A1 lines may be intermixed. On lines used for 1A, disconnect *H* leads from terminal 18 of terminal board. Insulate and store disconnected leads.

1.06 The H1, RS, and RH spade tipped leads in the D50P cord, and the A25A and A50A connector cables are used with 1A hold circuits.

Some conductors of the D50P cord and of A25A and A50A connector cables are dead-dressed with insulators (tubing). Do not use long-nose pliers to pull off the insulators. This may break the conductor or pull off the spade tip. Cut off insulation with electrician scissors or diagonal pliers.

2. INDEX FOR CONNECTION FIGURES

Fig. 1 — Typical Arrangement of 6050- and 6051-Type Keys

Fig. 2 — 599A Key

Fig. 3 — 598A Key

Fig. 4 — 599B Key

Fig. 5 — Connections for 6050A Key

Fig. 6 — Connections for 6050B Key

Fig. 7 — Connections for 6050C Key

Fig. 8 — Connections for 6051A Key (598A Key First Unit and 599A Key Second Unit)

Fig. 9 — Connections for 6051B Key (598A Key First Unit and 598A Key Second Unit)

Fig. 10 — Connections for 6051C Key (598A Key First Unit and 599B Key Second Unit)

Table A — Key Features

Table B — 599A Key or 599B Key Connections For 1A or 1A1 and 1A2 Key Telephone Systems

Table C — Telephone Set Connections, 1A1 or 1A2 Key Telephone System

© American Telephone and Telegraph Company, 1965
Printed in U.S.A.

Table D — Strap Conductor Connections Between Terminal Strips

Table E — Conversion from Pickup to Signaling

Table F — Connections for 6050-Type Key

Table G — Connections for 6051-Type Key (Blue Binder of A50A Connector Cable)

Table H — Connections for 6051-Type Key (Orange Binder of A50A Connector Cable)

TABLE A

KEY FEATURES

6050-TYPE KEYS									
6050A			6050B			6050C			CONNECTION TABLE
KEY	FEATURES	FIG.	KEY	FEATURES	FIG.	KEY	FEATURES	FIG.	
599A	P_s P_s P_s P_s P_s H	2 and 5	598A	P_s P_s P_s P_s P_s P_s	3 and 6	599B	C P_s P_s P_s P_s H	4 and 7	F A25A Conn Cable or D50P Cord
6051-TYPE KEYS									
6051A			6051B			6051C			CONNECTION TABLE
KEY	FEATURES	FIG.	KEY	FEATURES	FIG.	KEY	FEATURES	FIG.	
598A	P_s P_s P_s P_s P_s P_s	3 and 8	598A	P_s P_s P_s P_s P_s P_s	3 and 9	598A	P_s P_s P_s P_s P_s P_s	3 and 10	G For Connections for 1st Key. Blue Binder of A50A Conn Cable
599A	P_s P_s P_s P_s P_s H	2 and 8	598A	P_s P_s P_s P_s P_s P_s	3 and 9	599B	C P_s P_s P_s P_s H	4 and 10	H For Connections for 2nd Key. Orange Binder of A50A Conn Cable

Features:
P_s— Pickup or Signaling Key
C — Cutoff (Turn) Key
H — Hold Key

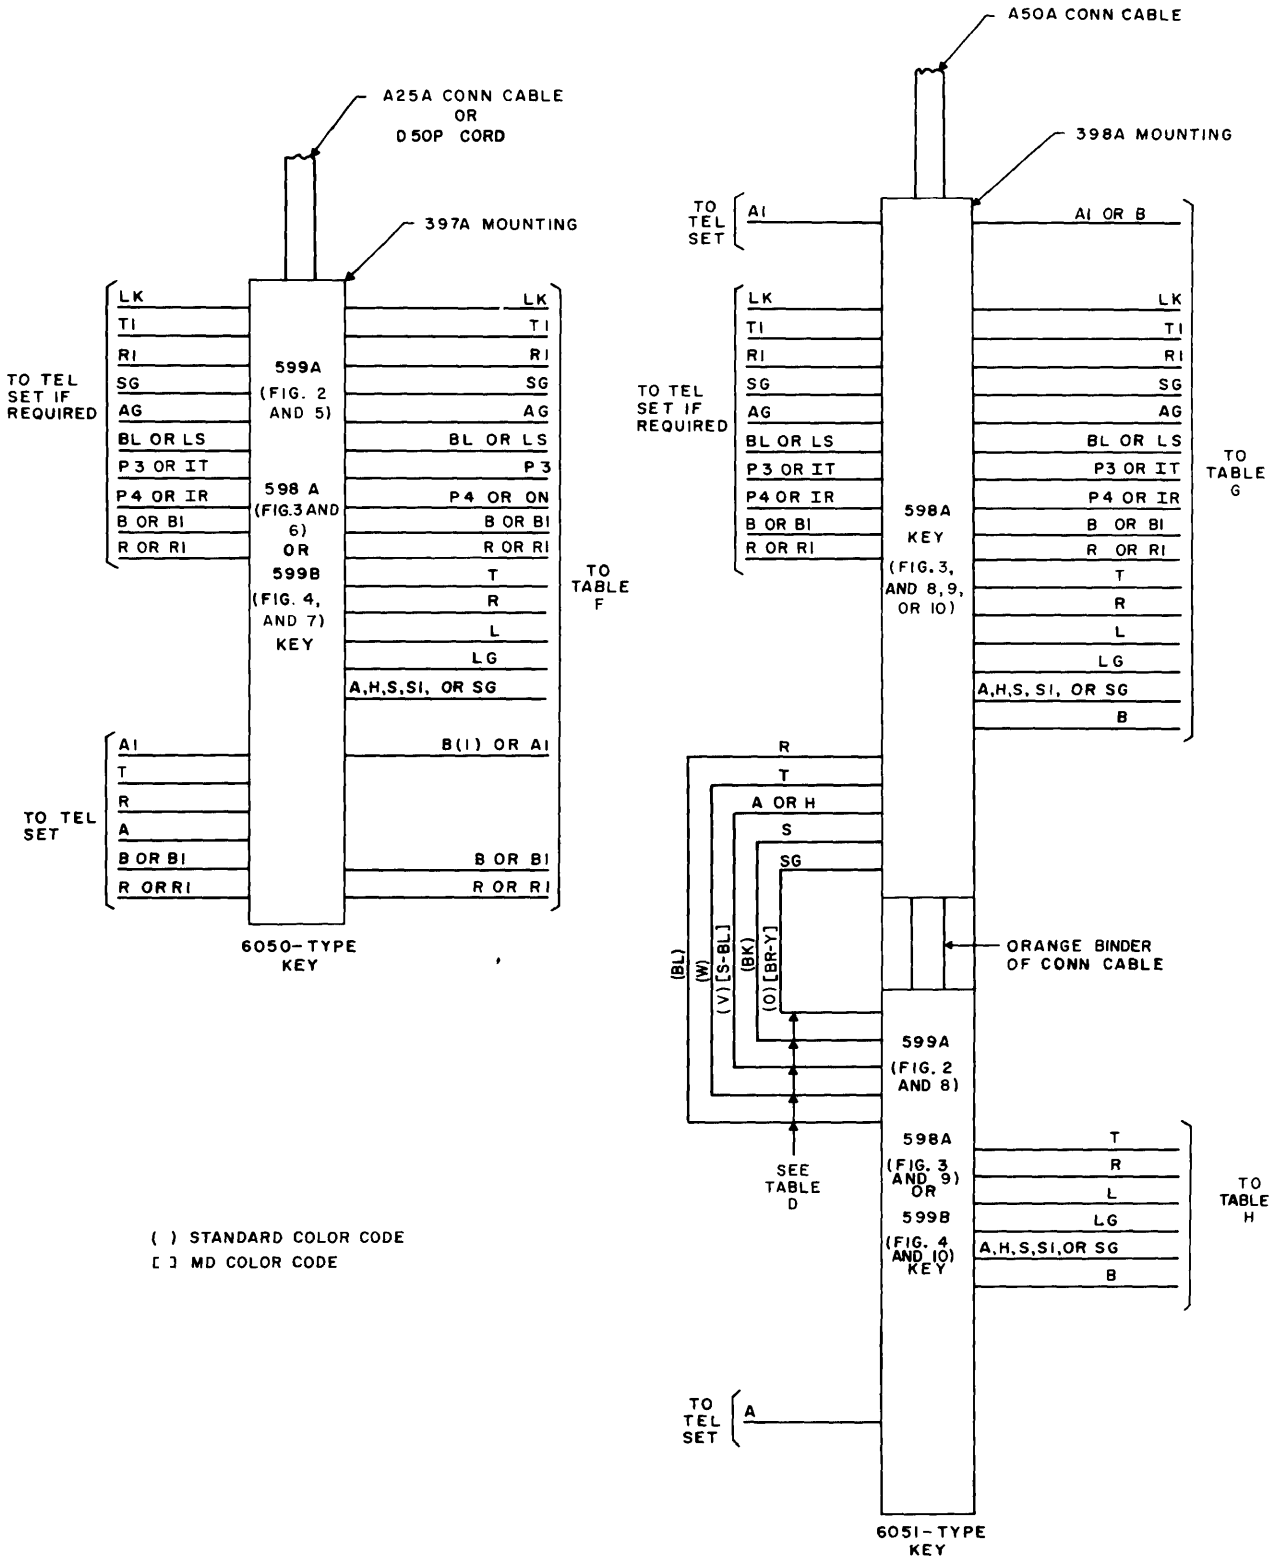

Fig. 1 — Typical Arrangement of 6050- and 6051-Type Keys

TABLE B

599A KEY OR 599B KEY CONNECTIONS FOR 1A OR 1A1 AND 1A2 KEY TELEPHONE SYSTEMS

* INSULATE AND STORE
( ) STANDARD COLOR CODE
[ ] MD COLOR CODE

A25A CONN CA OR D50P CORD

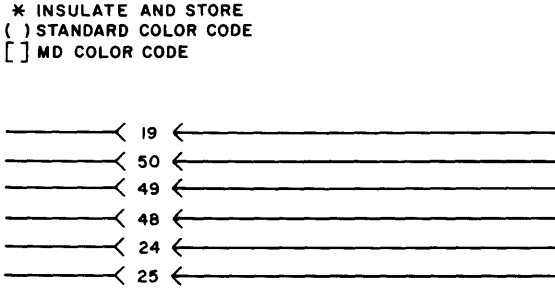

1A1 OR 1A2	1A
TO TERM. NO.	
2	3
*	2
*	3
*	18
3	*
18	*

TABLE C

TELEPHONE SET CONNECTIONS, 1A1 OR 1A2 KEY TELEPHONE SYSTEM

Connect Leads from Tel Set to Terminal of Conn Cable or D50P Cord Term. Strip as indicated		LEAD DESIGNATIONS													
		LINE		CONTROL LEADS		RINGER OR BUZZER		BSY LP SIG	SPEAKERPHONE						COM GRD
		R	T	A1	A	R OR R1	B OR B1	BL OR LS	LK	T1	R1	AG	P3 OR 1T	P4 OR 1R	SG
6050-TYPE KEY															
6050A Key		2	1	17	3	10	11	8	9	4	5	7	13	12	19
6050B Key		2	1	17	18	10	11	8	9	4	5	7	13	12	19
6050C Key		2	1	17	3	10	11	8	9	4	5	7	13	12	19
6051-TYPE KEY															
6051A	TS1 TS2	2	1	17	3	10	11	8	9	4	5	7	13	12	19
6051B	TS1 TS2	2	1	17	18	10	11	8	9	4	5	7	13	12	19
6051C	TS1 TS2	2	1	17	3	10	11	8	9	4	5	7	13	12	19

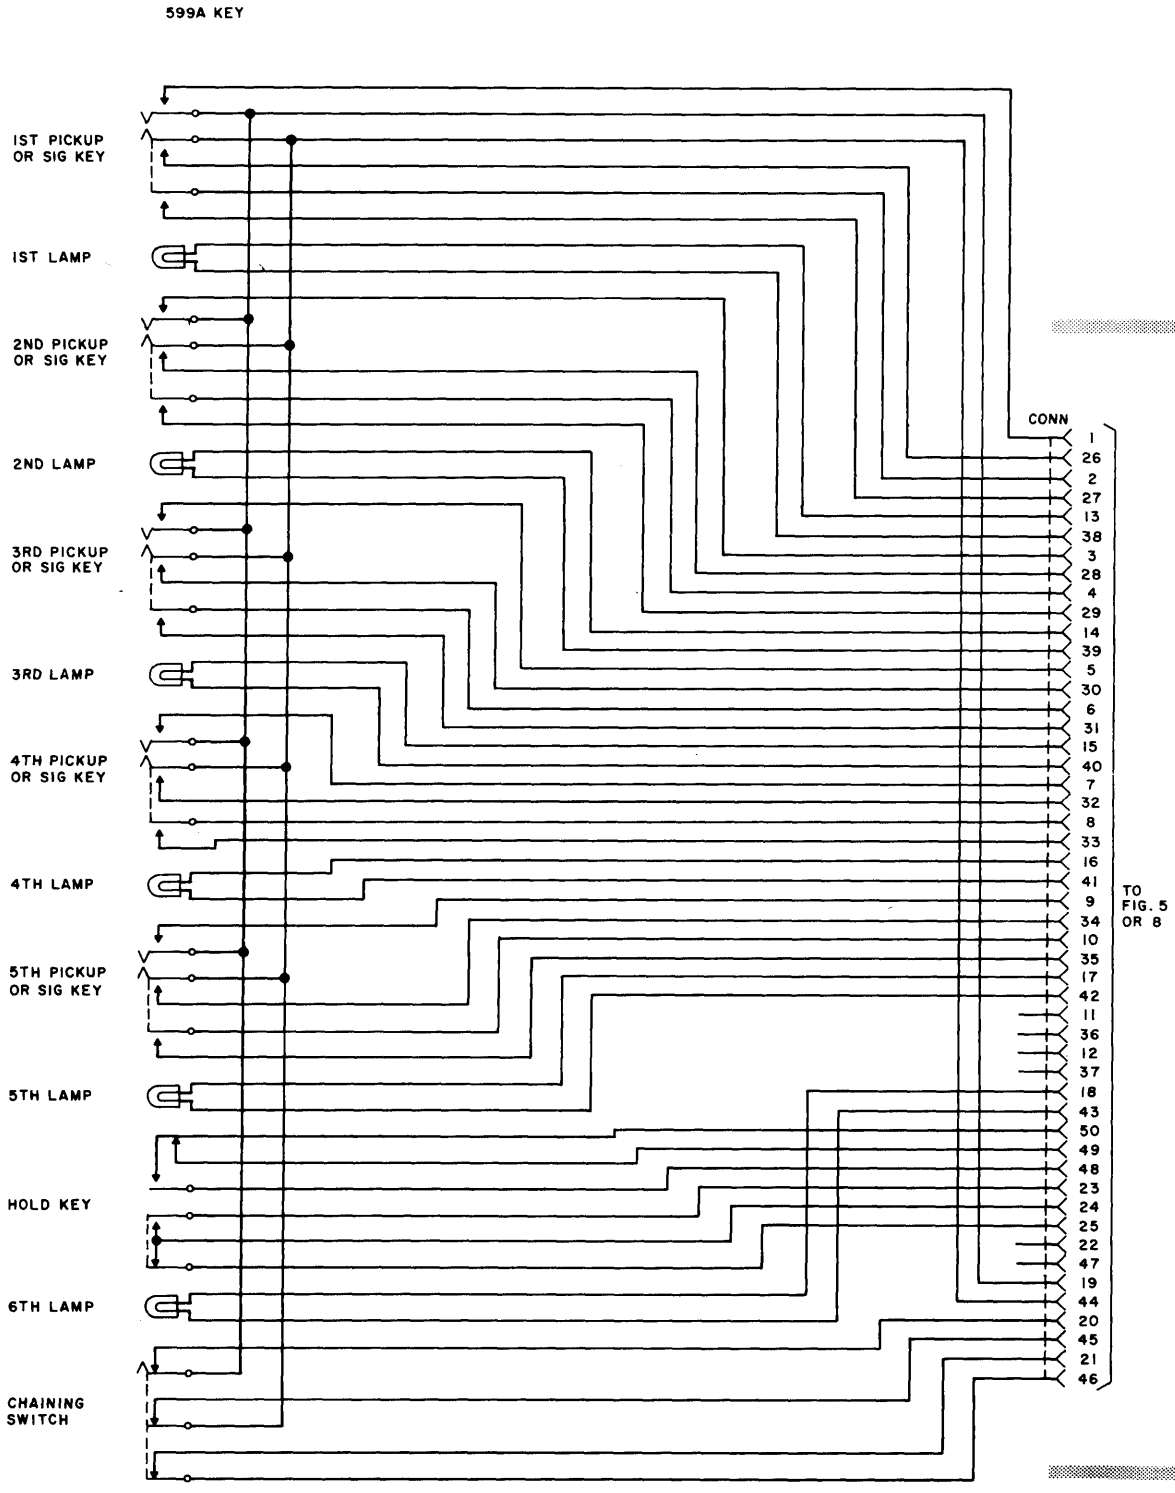

Fig. 2 — 599A Key

TABLE D

STRAP CONDUCTOR CONNECTIONS BETWEEN TERMINAL STRIPS

LEAD DESIGNATION	CONDUCTOR COLOR	TERMINAL STRIP 1 (NOTE 1)	TERMINAL STRIP 2
SG	(O) [BR-Y]	19	19
A OR H	(V) [S-BL]	18	16
T	W	1	14
R	BL	2	15
S	BK	6	6

Note 1: Terminal strip 1 is nearest the cable jacket

( ) Standard color code

[ ] MD color code

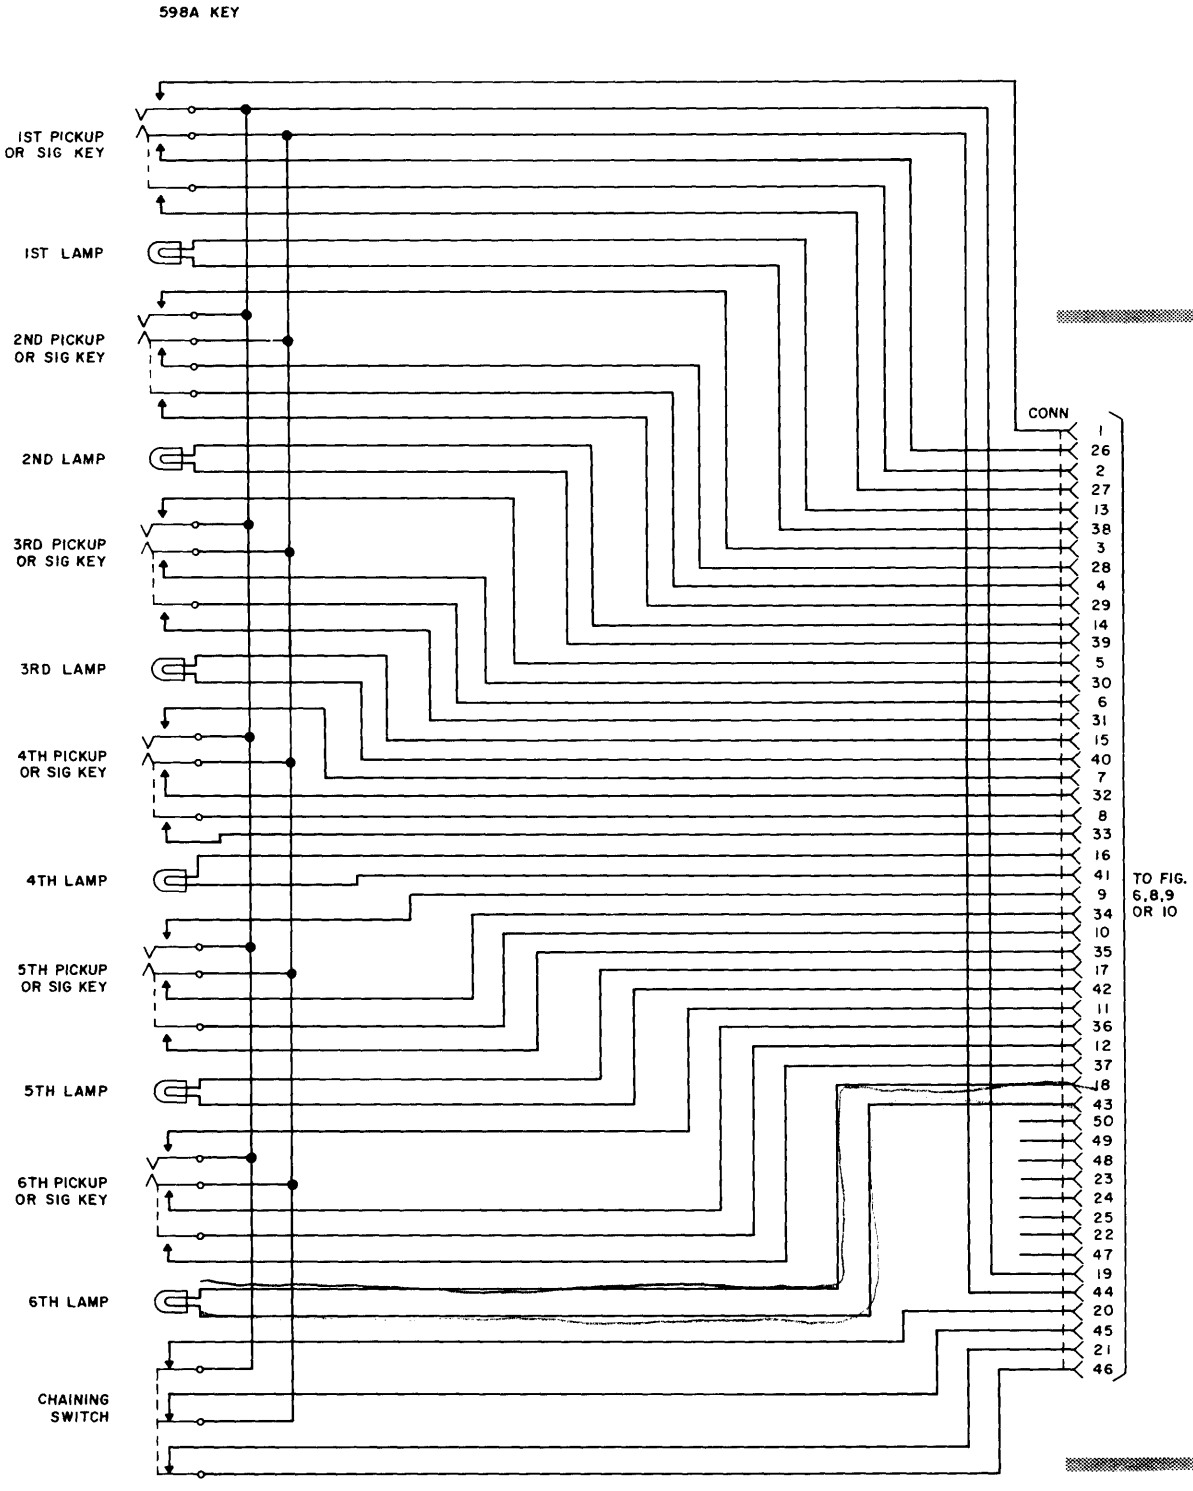

Fig. 3 — 598A Key

TABLE E

CONVERSION FROM PICKUP TO SIGNALING

A pickup (locking) key position may be converted to signaling (nonlocking). Remove P-10E837 screw detail from plunger at key position to be converted. Disconnect conductor strap associated with key position to be converted from punching 18 of terminal board. Reconnect strap to punching number shown below.

KEY BUTTON POSITION		POS 1	POS 2	POS 3	POS 4	POS 5	POS 6
Strap Conductor of A25A or A50A Connector Cable or D50P Cord		(O-W) [BK]	(S-W) [BR-G]	(G-R) [BR-W]	(BL-BK) [R-BL]	(BR-BK) [G-BL]	(Y-O) [S-BR]
599A	Common Signaling†	6	6	6	6	6	*
	Individual Signaling	19	19	19	19	19	*
598A	Common Signaling†	6	6	6	6	6	6
	Individual Signaling	19	19	19	19	19	19
599B (Note)	Common Signaling†	6	6	6	6	*	*
	Individual Signaling	19	19	19	19	*	*

Note: Turn key may be converted for use as a depressible (mechanical) release key. Remove blocking spacer furnished in button assembly. Turn key may be depressed in either position. This releases any operated pickup key but does not affect turn key spring pile-up.

*Not a pickup key. Not to be converted.

†Common signaling is a means of using a single nonlocking key to signal on any of two or more lines terminated in a set. The method of operation consists of (a) depressing the pickup button of the line over which signaling is desired, then (b) depressing the common signaling key.

Convert for common signaling as follows:

(1) Select a pickup key to be used as the common signal key.

(2) Convert the key for signaling.

(3) Disconnect the conductor strap of this key from terminal 18 of the terminal strip. Connect strap to terminal 6.

(4) Disconnect "S" lead conductor straps of pickup keys involved in the common signaling arrangement from terminal 18 of the terminal strip. Connect straps to terminal 6. Do not mechanically convert pickup keys to nonlocking.

(5) At the equipment, connect signal ground to the "A" lead of key selected as common signal key.

Caution: Common signaling cannot be used on any line which requires "A" lead control.

( ) Standard color code

[ ] MD color code

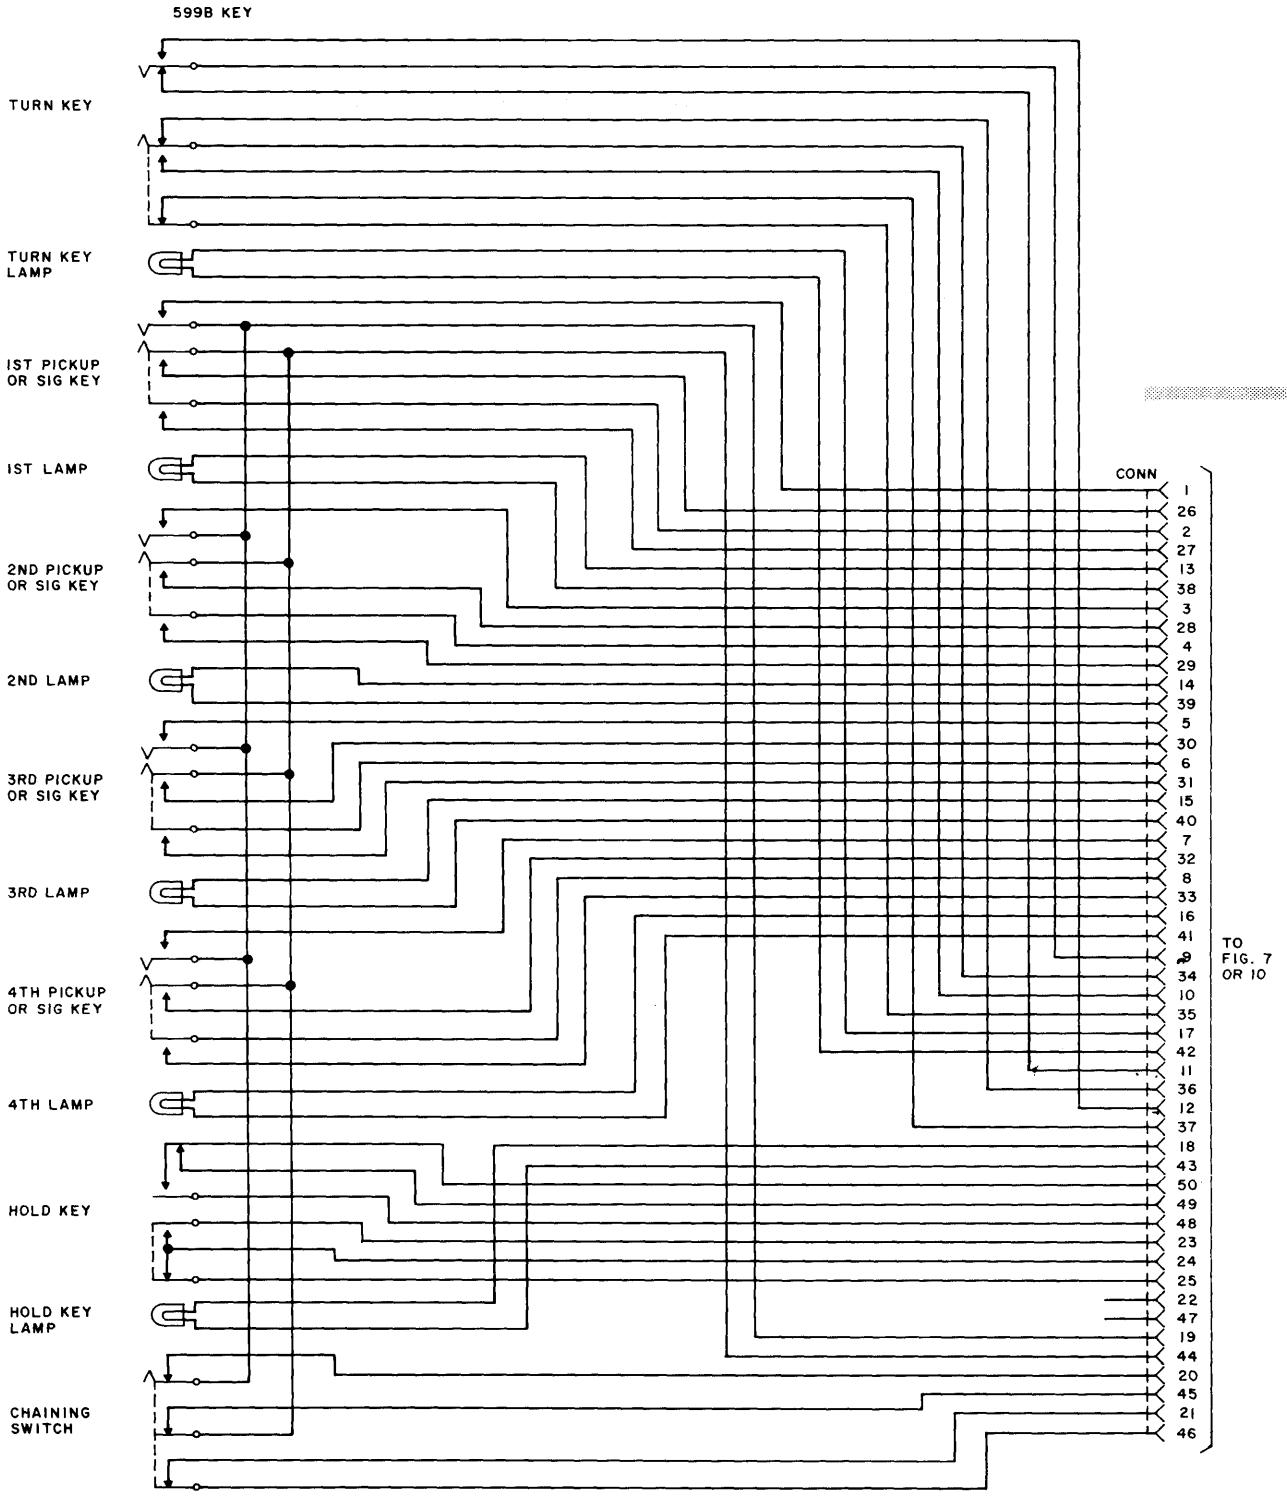

Fig. 4 — 599B Key

TABLE F

CONNECTIONS FOR 6050-TYPE KEY

FIG. NO.	TERMINATION AT KEY			LEAD DESIGNATION			A25A CONNECTOR CABLE OR D50P CORD			CONNECT TO
	PLUG TERM. NO.	STRAP COLOR	TERM. STRIP TERM. NO.	6050 A (599A KEY)	6050 C (599B KEY)	6050 B (598A KEY)	SOLID COLOR	BAND COLOR	CABLE PAIR	
5, 6, OR 7	1			R	R	R	BL	W	1	LINE AND SIGNALING CIRCUITS, OR EXCLUSION KEYS OR CUTOFF KEYS AT OTHER STATIONS
	26			T	T	T	W	BL		
			17	B OR A1	B OR A1	B OR A1	O	W	2	
	27			A,H,S,S1, OR SG	A,H,S,S1, OR SG	A,S,S1, OR SG	W	O		
	13			L	L	L	G	W	3	
	38			LG	LG	LG	W	G		
	3			R	R	R	BR	W	4	
	28			T	T	T	W	BR		
			NOTE 1	B	B	B	S	W	5	
	29			A,H,S,S1, OR SG	A,H,S,S1, OR SG	A,S,S1, OR SG	W	S		
	14			L	L	L	BL	R	6	
	39			LG	LG	LG	R	BL		
	5			R	R	R	O	R	7	
	30			T	T	T	R	O		
			NOTE 1	B	B	B	G	R	8	
	31			A,H,S,S1, OR SG	A,H,S,S1, OR SG	A,S,S1, OR SG	R	G		
	15			L	L	L	BR	R	9	
	40			LG	LG	LG	R	BR		
	7			R	R	R	S	R	10	
	32			T	T	T	R	S		
			NOTE 1	B	B	B	BL	BK	11	
	33			A,H,S,S1, OR SG	A,H,S,S1, OR SG	A,S,S1, OR SG	BK	BL		
	16			L	L	L	O	BK	12	
	41			LG	LG	LG	BK	O		
	9			R	↟	R	G	BK	13	
	34			T	↟	T	BK	G		
			NOTE 1	B	SPARE	B	BR	BK	14	
	35			A,H,S,S1, OR SG	↟	A,S,S1, OR SG	BK	BR		
	17			L	L	L	S	BK	15	
	42			LG	LG	LG	BK	S		
	11			SPARE	↟	R	BL	Y	16	
	36			SPARE	↟	T	Y	BL		
			NOTE 1	SPARE	SPARE	B	O	Y	17	
	37			SPARE	↟	A,S,S1, OR SG	Y	O		
	18			L	L	L	G	Y	18	
	43			LG	LG	LG	Y	G		
			19	SG †	SG †	SG †	BR	Y	19	LINE AND SIGNALING CIRCUIT OR SPEAKER-PHONE CIRCUIT OR VISUAL AND AUDIBLE SIGNALING CIRCUIT
			8	BL OR LS	BL OR LS	BL OR LS	Y	BR		
			10	R OR R1	R OR R1	R OR R1	S	Y	20	
			11	B OR B1	B OR B1	B OR B1	Y	S		
				SPARE ✱	↟	SPARE ✱	BL	V	21	
				SPARE ✱	†	SPARE ✱	V	BL		
				SPARE ✱	SPARE ✱	SPARE ✱	O	V	22	
				SPARE ✱	SPARE ✱	SPARE ✱	V	O		
			5	R1 †	R1 †	R1 †	G	V	23	
			4	T1 †	T1 †	T1 †	V	G		
			12	P4 OR IR †	P4 OR IR †	P4 OR IR †	BR	V	24	
			13	P3 OR IT †	P3 OR IT †	P3 OR IT †	V	BR		
			9	LK †	LK †	LK †	S	V	25	
			7	AG †	AG †	AG †	V	S		
	11	(BL-Y)[O-R]	5 ✱	R1	R1	R1				TEL SET WHEN REQUIRED
	36	(Y-BL)[O-G]	4 ✱	T1	T1	T1				
	37	(O-Y)[O-BK]	9 ✱	LK	LK	LK				
	2	(O-W)[BK]	18	A OR H	A OR H	A				TEL SET ON 6050B KEY ONLY
	4	(S-W)[BR-G]	18							
	6	(G-R)[BR-W]	18							
	8	(BL-BK)[R-BL]	18							
	21	(V-G)[BL-W]	18							
	25	(Y-G)[BK-BL]	18							
	10	(BR-BK)[G-BL]	18		↟					
	12	(Y-O)[S-BR]	18		↟					
	19	(R)[R-Y]	2	R	R	R				TEL SET
	44	(G)[G-Y]	1	T	T	T				
	24	(W-O)[R-BK]	3	A	A					
	45	(W)[V-BL]	14							
	20	(O-V)[BL]	15							
	46	(G-V)[S-BL]	16							
	48	(G-Y)[BK-W]	NOTE 2	H1	H1					
	49	(V-BR)[S-BK]	NOTE 2	RS	RS					
	50	(BR-V)[S-Y]	NOTE 2	RH	RH					

✱ LEADS ARE SPADE TIPPED, INSULATED AND STORED

† SPEAKERPHONE LEADS

↟ TURN KEY LEAD. LEAD DESIGNATION IS DETERMINED BY CONNECTING CIRCUIT.

NOTE 1: LEAD IS CUT DEAD AND INSULATED AT THE BUTT.

NOTE 2: THREE SPADE-TIPPED LEADS IN THE HOLD CIRCUIT ARE AVAILABLE FOR USE WITH THE HOLD CIRCUITS OF 1A. SEE TABLE B.

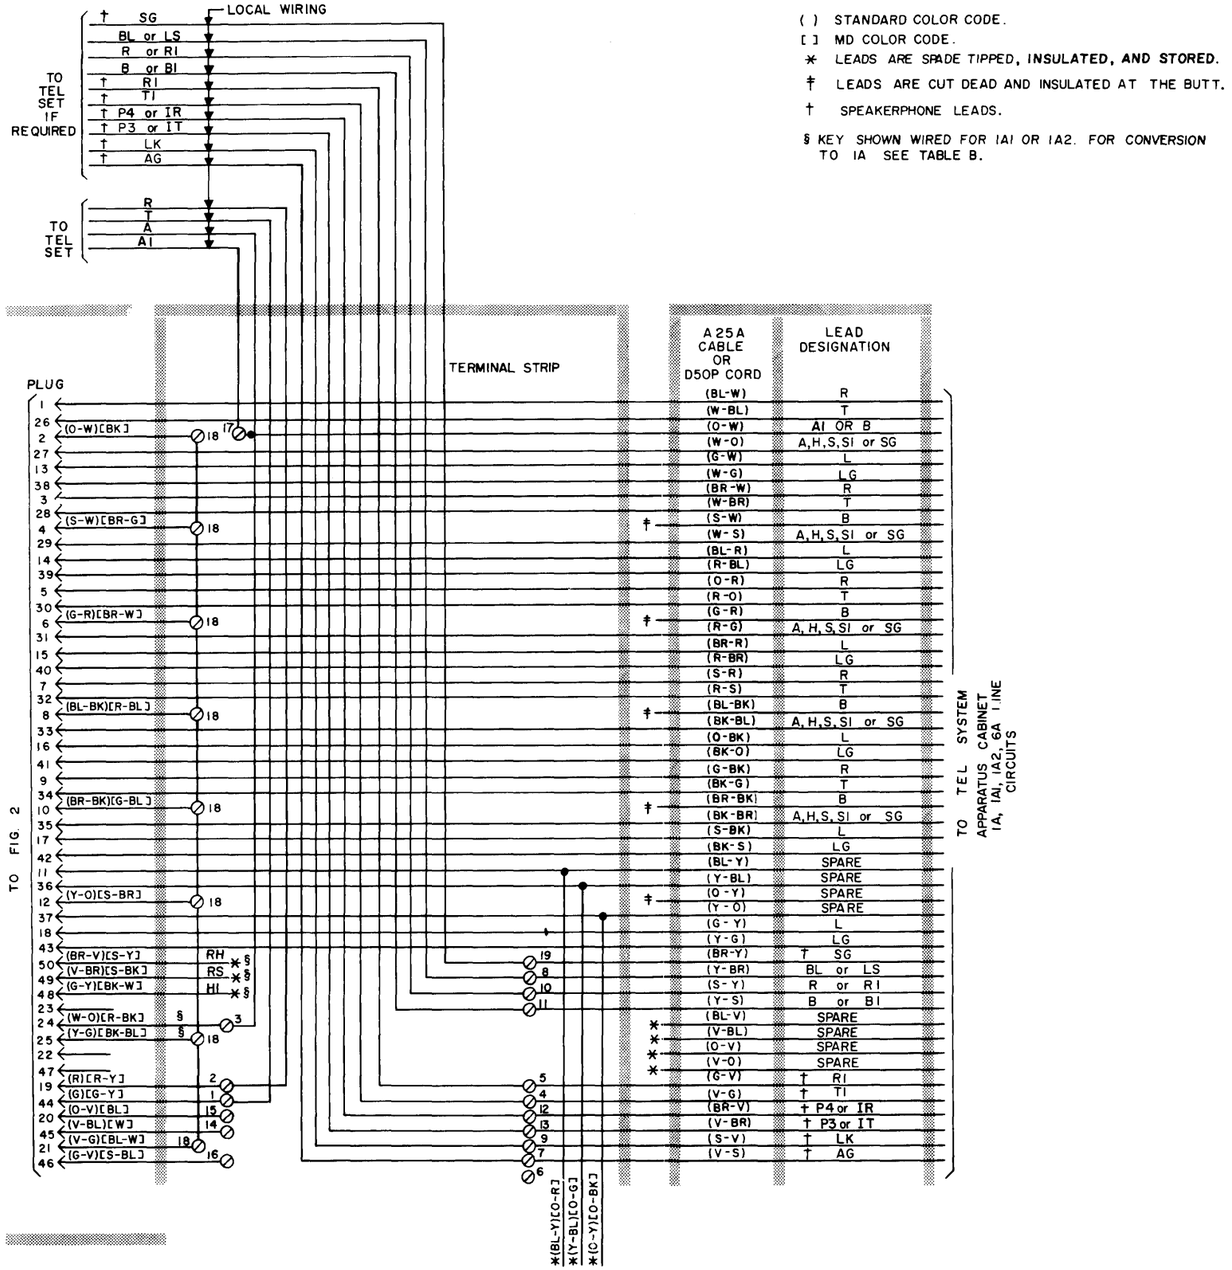

Fig. 5 — Connections for 6050A Key

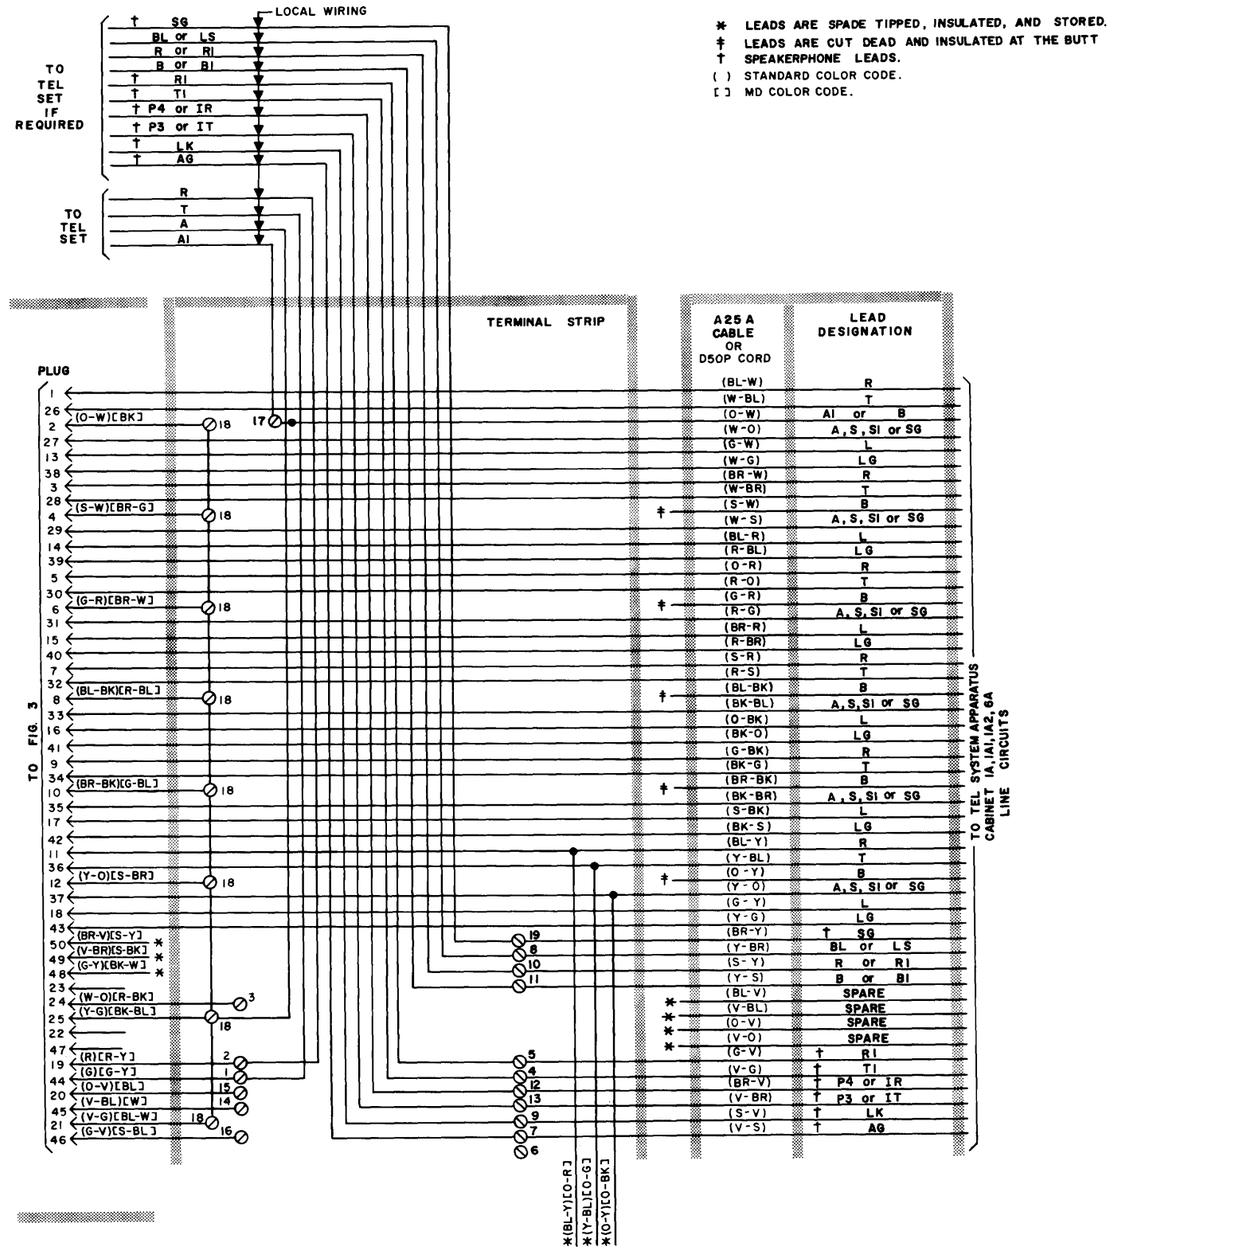

Fig. 6 — Connections for 6050B Key

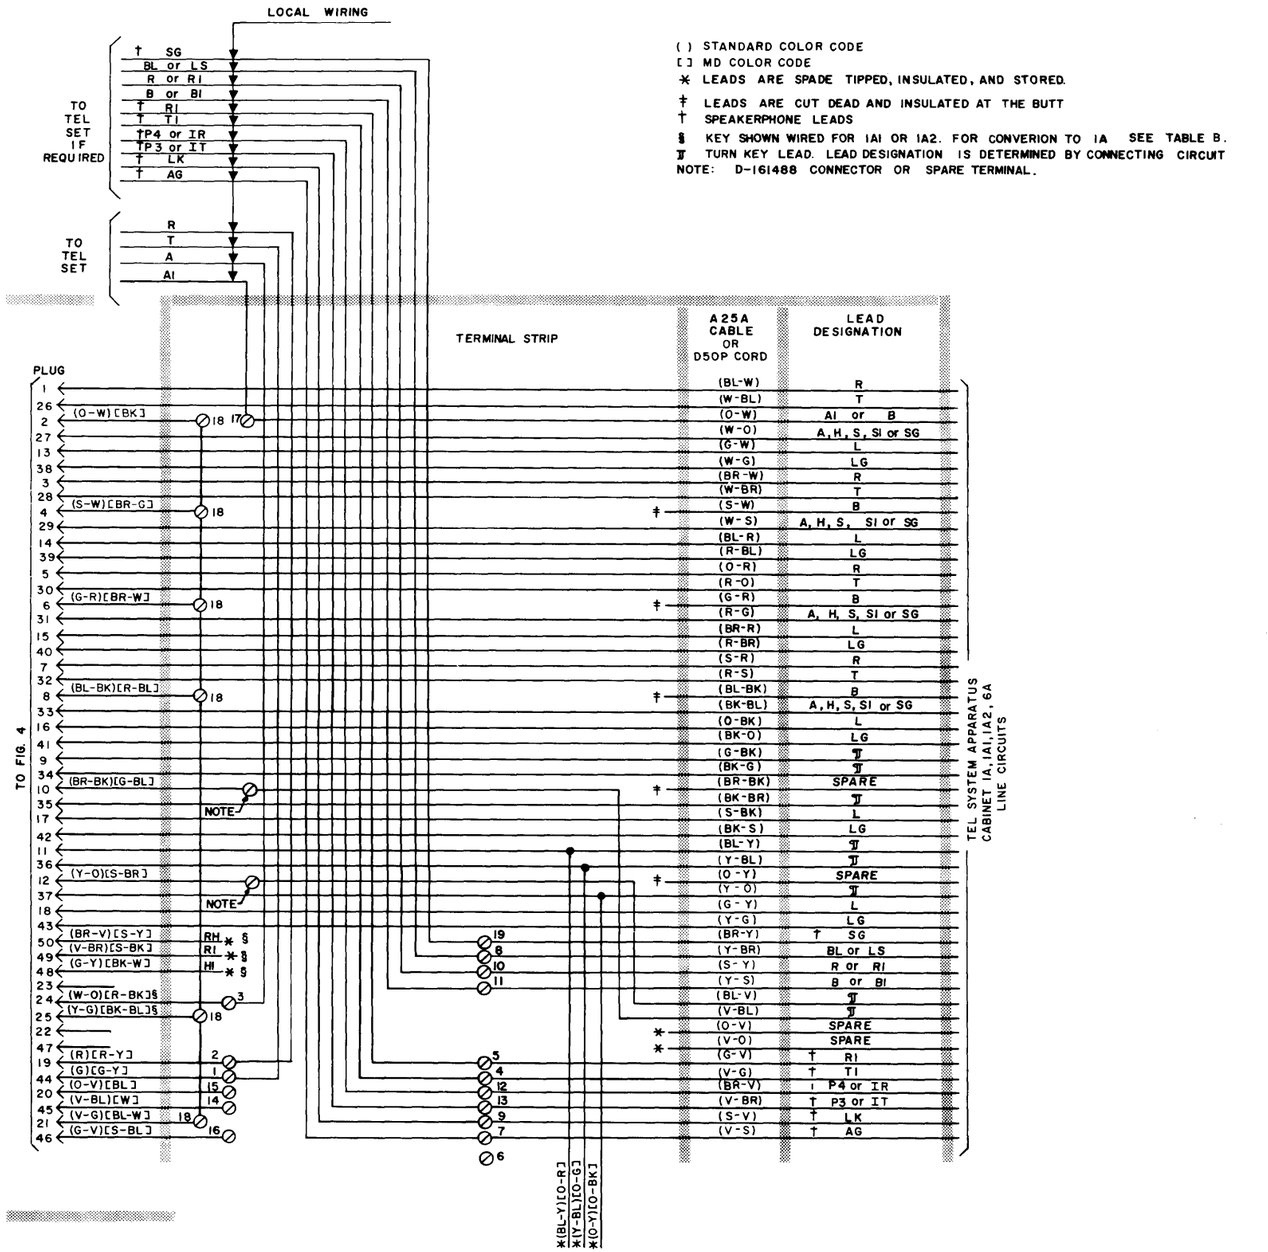

( ) STANDARD COLOR CODE
[ ] MD COLOR CODE
* LEADS ARE SPADE TIPPED, INSULATED, AND STORED.
‡ LEADS ARE CUT DEAD AND INSULATED AT THE BUTT
† SPEAKERPHONE LEADS
§ KEY SHOWN WIRED FOR 1AI OR 1A2. FOR CONVERION TO 1A SEE TABLE B.
¶ TURN KEY LEAD. LEAD DESIGNATION IS DETERMINED BY CONNECTING CIRCUIT
NOTE: D-161488 CONNECTOR OR SPARE TERMINAL.

Fig. 7 — Connections for 6050C Key

TABLE G

CONNECTIONS FOR 6051-TYPE KEY (BLUE BINDER OF A50A CONNECTOR CABLE)

FIG. NO.	TERMINATION AT KEY			LEAD DESIGNATION	CONNECTOR CABLE A50A, BLUE-BINDER			CONNECT TO
	PLUG TERM. NO.	STRAP COLOR	STRIP TERM. NO.	598A KEY	SOLID COLOR	BAND COLOR	CABLE PAIR	
8, 9, OR 10 (598A KEY)	1			R	BL	W	1	LINE AND SIGNALING CIRCUITS, OR EXCLUSION KEYS OR CUTOFF KEYS AT OTHER STATIONS
	26			T	W	BL		
	27		17	B OR A1	O	W	2	
	13			A,H,S,S1, OR SG	W	O		
	38			L	G	W	3	
	3			LG	W	G		
	28			R	BR	W	4	
	4		NOTE 1	T	W	BR		
	29			B	S	W	5	
	14			A,H,S,S1, OR SG	W	S		
	39			L	BL	R	6	
	5			LG	R	BL		
	30			R	O	R	7	
	6		NOTE 1	T	R	O		
	31			B	G	R	8	
	15			A,H,S,S1, OR SG	R	G		
	40			L	BR	R	9	
	7			LG	R	BR		
	32			R	S	R	10	
	8		NOTE 1	T	R	S		
	33			B	BL	BK	11	
	16			A,H,S,S1, OR SG	BK	BL		
	41			L	O	BK	12	
	9			LG	BK	O		
	34			R	G	BK	13	
	10		NOTE 1	T	BK	G		
	35			B	BR	BK	14	
	17			A,H,S,S1, OR SG	BK	BR		
	42			L	S	BK	15	
	11			LG	BK	S		
				R	BL	Y	16	
				T	Y	BL		
			NOTE 1	B	O	Y	17	
				A,H,S,S1, OR SG	Y	O		
				L	G	Y	18	
				LG	Y	G		
			19	SG	BR	Y	19	
			8	BL OR LS †	Y	BR		LINE AND SIGNALING CIRCUIT OR SPEAKER-PHONE CIRCUIT OR VISUAL AND AUDIBLE SIGNALING CIRCUIT
			10	R OR R1 †	S	Y	20	
			11	B OR B1 †	Y	S		
				SPARE *	BL	V	21	
				SPARE *	V	BL		
				SPARE *	O	V	22	
				SPARE *	V	O		
			5	R1 †	G	V	23	
			4	T1 †	V	G		
			12	P4 OR ON †	BR	V	24	
			13	P3 †	V	BR		
			9	LK †	S	V	25	
			7	AG †	V	S		
	11	(BL-T)[O-R]	5	R1 *				TEL SET WHEN REQUIRED
	36	(Y-BL)[O-S]	4	T1 *				
	37	(O-Y)[O-BK]	9	LK *				
	2	(O-W)[BL]	18					
	4	(S-W)[BK-G]	18					
	6	(G-R)[BR-W]	18					
	8	(BL-BK)[R-BL]	18	A OR H	SEE TABLE D			
	10	(BR-BK)[G-BL]	18					
	12	(Y-O)[S-BR]	18		(V)[S-BL]			SECOND KEY UNIT
	19	(R)[R-Y]	2	R	BL	Q		
	44	(G)[G-Y]	1	T	W			
	20	(O-Y)[BL]	15					
	25	(Y-BL)[W]	14					
	21	(V-G)[BL-W]	18	A OR H				
	46	(G-V)[G-BL]	16					
	48	(G-Y)[BR-W]						
	24	(W-O)[R-BK]	3					
	49	(Y-BR)[S-BK]						
	25	(Y-G)[BR-BL]	18	A OR H				
	50	(BR-Y)[S-Y]						
			6	S	BK			SECOND KEY UNIT
			19	SG	(O)[BR-Y]			

* LEADS ARE SPADE TIPPED INSULATED AND STORED.

† SPEAKERPHONE LEADS.

( ) STANDARD COLOR CODE.

[ ] MD COLOR CODE.

NOTE 1: LEAD IS CUT DEAD AND INSULATED AT THE BUTT.

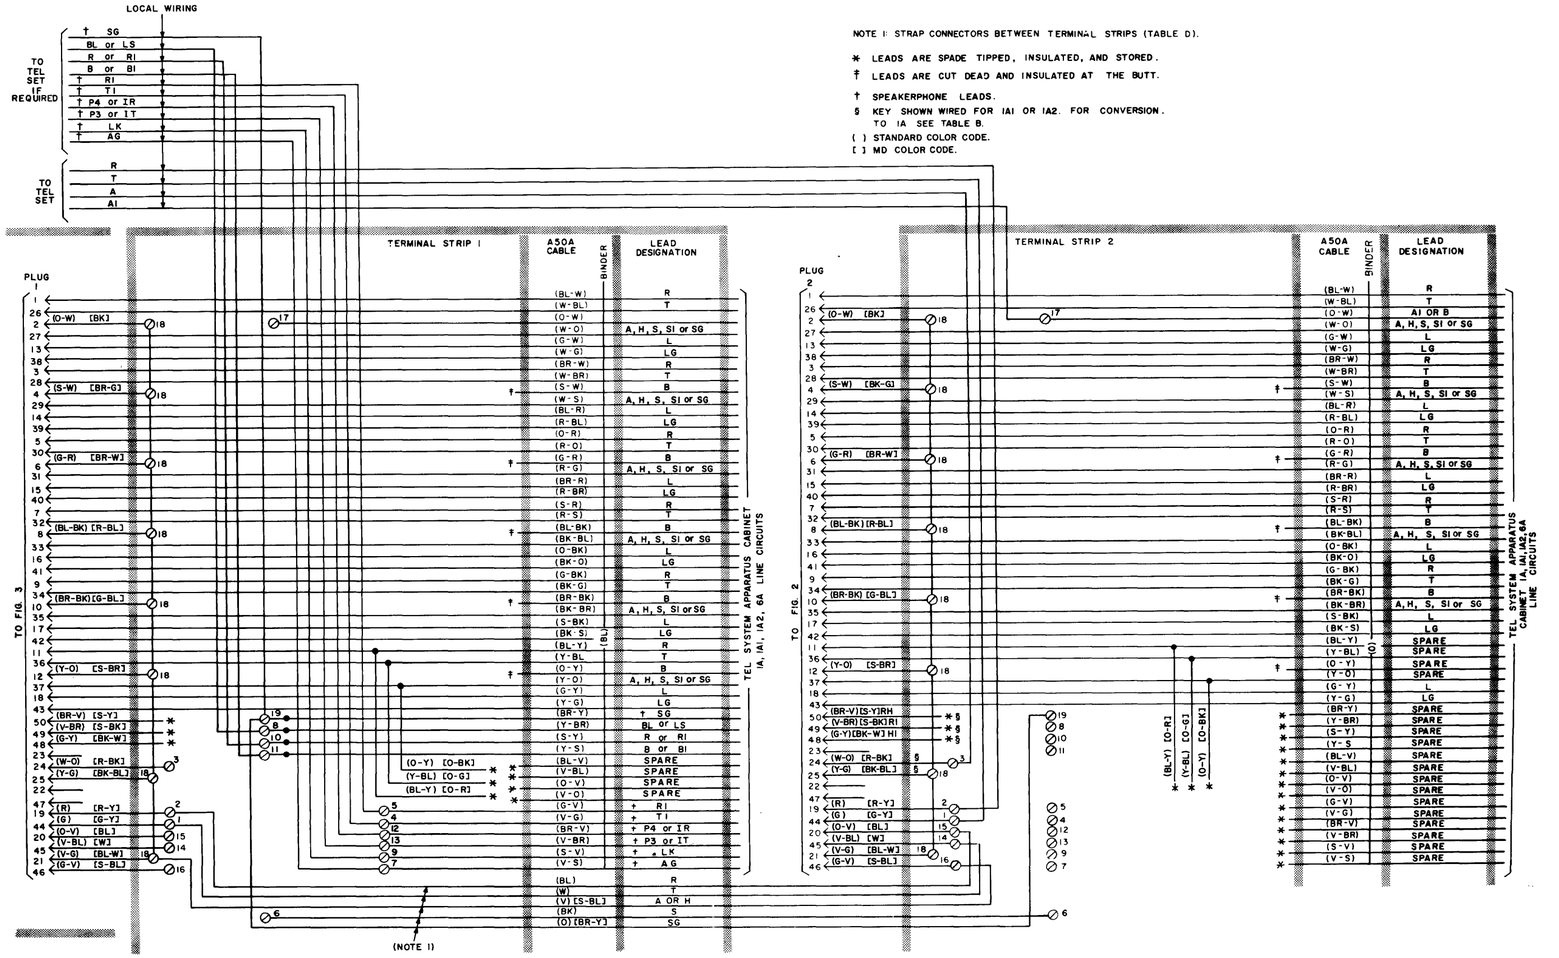

Fig. 8 — Connections for 6051A Key (598A Key First Unit and 599A Key Second Unit)

TABLE H

CONNECTIONS FOR 6051-TYPE KEY (ORANGE BINDER OF A50A CONNECTOR CABLE)

FIG. NO.	TERMINATION OF KEY			LEAD DESIGNATION			CONNECTOR CABLE A50A, ORANGE-BINDER			CONNECT TO
	PLUG TERM. NO.	STRAP COLOR	TERM. STRIP TERM. NO.	599A KEY	599B KEY	598A KEY	SOLID COLOR	BAND COLOR	CABLE PAIR	
8,9 OR 10	1			R	R	R	BL	W	26	LINE AND SIGNALING CIRCUITS, OR EXCLUSION KEYS OR CUTOFF KEYS AT OTHER STATIONS
	26			T	T	T	W	BL		
			17				O	W	27	
	27			A,H,S,S1 OR SG	A,H,S,S1, OR SG	A,H,S,S1, OR SG	W	O		
	13			L	L	L	G	W	28	
	38			LG	LG	LG	W	G		
	3			R	R	R	BR	W	29	
	28			T	T	T	W	BR		
			NOTE 1	B	B	B	S	W	30	
	29			A,H,S,S1, OR SG	A,H,S,S1, OR SG	A,H,S,S1, OR SG	W	S		
	14			L	L	L	BL	R	31	
	39			LG	LG	LG	R	BL		
	5			R	R	R	O	R	32	
	30			T	T	T	R	O		
			NOTE 1	B	B	B	G	R	33	
	31			A,H,S,S1, OR SG	A,H,S,S1, OR SG	A,H,S,S1, OR SG	R	G		
	15			L	L	L	BR	R	34	
	40			LG	LG	LG	R	BR		
	7			R	R	R	S	R	35	
	32			T	T	T	R	S		
			NOTE 1	B	B	B	BL	BK	36	
	33			A,H,S,S1, OR SG	A,S,S1, OR SG	A,S,S1, OR SG	BK	BL		
	16			L	L	L	O	BK	37	
	41			LG	LG	LG	BK	O		
	9			R	†	R	G	BK	38	
	34			T	†	T	BK	G		
			NOTE 1	B	SPARE	B	BR	BK	39	
	35			A,H,S,S1, OR SG	†	A,H,S,S1, OR SG	BK	BR		
	17			L	L	L	S	BK	40	
	42			LG	LG	LG	BK	S		
	11			SPARE	†	R	BL	Y	41	
	36			SPARE	†	T	Y	BL		
			NOTE 1	SPARE	SPARE	B	O	Y	42	
	12			SPARE	†	A,H,S,S1 OR SG	Y	O		
	18			L	L	L	G	Y	43	
	43			LG	LG	LG	Y	G		
				SPARE ✱	SPARE ✱	SPARE	BR	Y	44	LINE AND SIGNALING CIRCUIT OR SPEAKER PHONE CIRCUIT OR VISUAL AND AUDIBLE SIGNALING CIRCUIT
				SPARE ✱	SPARE ✱	SPARE	Y	BR		
				SPARE ✱	SPARE ✱	SPARE	Y	S	45	
				SPARE ✱	† ✱	SPARE	BL	V		
				SPARE ✱	† ✱	SPARE	V	BL	46	
				SPARE ✱	SPARE ✱	SPARE	O	V		
				SPARE ✱	SPARE ✱	SPARE	V	O	47	
			5	SPARE ✱	SPARE ✱	SPARE	G	V		
			4	SPARE ✱	SPARE ✱	SPARE	V	G	48	
			12	SPARE ✱	SPARE ✱	SPARE	BR	V		
			13	SPARE ✱	SPARE ✱	SPARE	V	BR	49	
			9	SPARE ✱	SPARE ✱	SPARE	S	V		
			7	SPARE ✱	SPARE ✱	SPARE	V	S	50	
	11	(BL-Y)[O-BR]	S ✱	R1	R1	R1				TO TEL SET WHEN REQUIRED
	36	(Y-BL)[O-G]	4 ✱	T1	T1	T1				
	37	(O-Y)[O-BK]	9 ✱	LK	LK	LK				
	2	(O-W)[BK]	18	A OR H	A OR H	A OR H	STRAP CONDUCTORS SEE TABLE D			TEL SET ON A051B KEY ONLY
	4	(S-W)[BR-G]	18							
	6	(G-R)[BR-W]	18							
	8	(BL-BK)[R-BL]	18							
	25	(Y-S)[W-BL]	18							
	10	(BR-BK)[G-BL]	18		†					
	23	(Y-O)[S-BR]	18		†					
	21	(V-G)[BL-W]	18		A OR H					TEL SET
	19	(R)[R-Y]	2	R	R	R				
	44	(G)[G-Y]	1	T	T	T				
			6	S	S	S	BR			FIRST KEY UNIT
			19	SG	SG	SG	(O)[BR-Y]			
	20	(O-V)[BL]	15	R	R	R	BL			
	45	(V-BL)[W]	14	T	T	T	W			
	46	(G-V)[S-BL]	16	A OR H	A OR H	A OR H	(V)[S-BL]			
	24	(W-O)[R-BK]	3	A	A	A				TEL SET
	48	(G-Y)[BK-W]	NOTE 2 ✱	H1	H1					
	49	(V-BK)[S-BL]	NOTE 2 ✱	RS	RS					
	50	(BR-V)[S-Y]	NOTE 2 ✱	RH	RH					

✱ LEADS ARE SPADE TIPPED, INSULATED AND STORED
† TURN BUTTON LEADS. LEAD DESIGNATION IS DETERMINED BY CONNECTING CIRCUIT.
( ) STANDARD COLOR CODE.
[ ] MD COLOR CODE.
NOTE 1: LEAD IS CUT DEAD AND INSULATED AT THE BUTT.

NOTE 2: THREE SPADE-TIPPED LEADS IN THE HOLD CIRCUIT ARE AVAILABLE FOR USE WITH THE HOLD CIRCUITS OF 1A. SEE TABLE B.

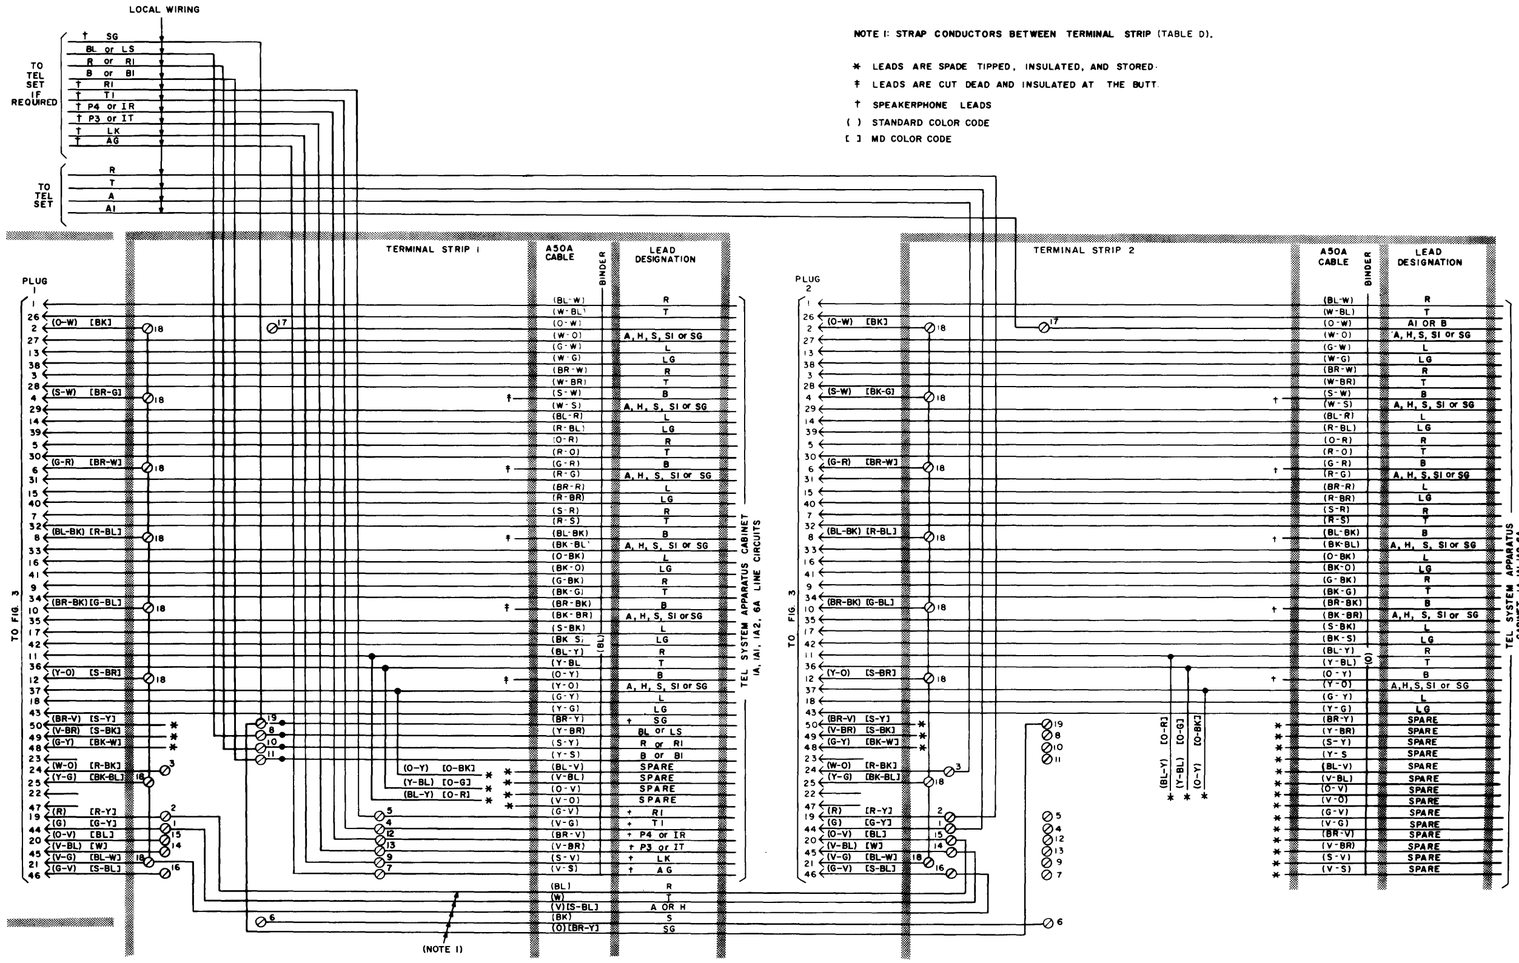

Fig. 9 — Connections for 6051B Key (598A Key First Unit and 598A Key Second Unit)

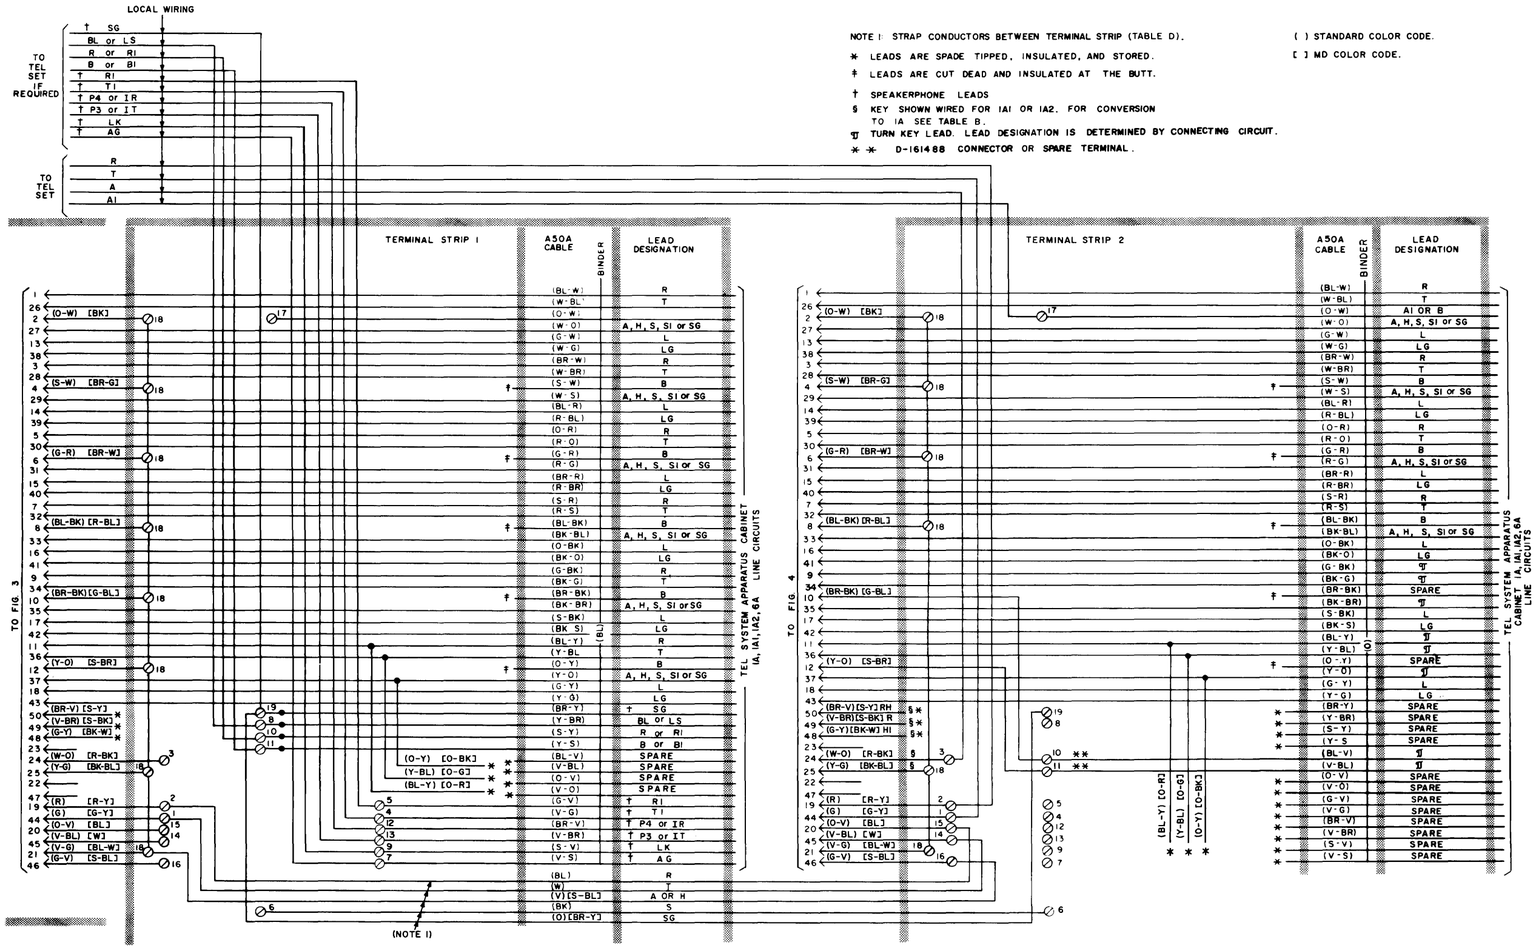
LOCAL WIRING
TO TEL SET IF REQUIRED
† SG
BL or LS
R or RI
B or BI
† RI
† TI
† P4 or IR
† P3 or IT
† LK
† AG
TO TEL SET
R
T
A
AI
NOTE 1: STRAP CONDUCTORS BETWEEN TERMINAL STRIP (TABLE D).
* LEADS ARE SPADE TIPPED, INSULATED, AND STORED.
‡ LEADS ARE CUT DEAD AND INSULATED AT THE BUTT.
† SPEAKERPHONE LEADS
$ KEY SHOWN WIRED FOR 1A1 OR 1A2. FOR CONVERSION TO 1A SEE TABLE B.
TURN KEY LEAD. LEAD DESIGNATION IS DETERMINED BY CONNECTING CIRCUIT.
* * D-161488 CONNECTOR OR SPARE TERMINAL.
( ) STANDARD COLOR CODE.
[ ] MD COLOR CODE.
TERMINAL STRIP 1
A50A CABLE
BINDER
LEAD DESIGNATION
TERMINAL STRIP 2
TO FIG. 3
TO FIG. 4
TEL SYSTEM APPARATUS CABINET 1A, 1A1, 1A2, 6A LINE CIRCUITS
(NOTE 1)

Fig. 10 — Connections for 6051C Key (598A Key First Unit and 599B Key Second Unit)